




**PE 100 SDR 11(PN16) & SDR 17(PN10)**  
Flange Adapter - Long Type (Injection)

Standard: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1


Size(mm)	Pressure(Bar)	d1 (mm)	d2 (mm)	L (mm)	L1 (mm)	Z (mm)	Weight (kg)
<b>d</b>							
20	PN 16	27	45	7	43	75	0,026
25	PN 16	33	58	8	40	82	0,035
32	PN 16	40	67	9	44	82	0,054
40	PN 16	50	78	9	61	86	0,075
50	PN 16	61	88	13	52	84	0,120
63	PN 16	75	102	15	65	100	0,170
75	PN 16	89	122	17	84	122	0,285
90	PN 10	105	138	15	80	120	0,315
	PN 16	105	138	15	80	120	0,385
	PN 20	105	138	15	80	120	0,450
	PN 25	105	138	15	80	120	0,475
110	PN 32	105	138	15	80	120	0,500
	PN 10	122	158	18	100	140	0,500
	PN 16	122	158	18	100	140	0,600
	PN 20	122	158	18	100	140	0,710
125	PN 25	122	160	20	100	145	0,850
	PN 32	122	160	20	100	145	0,950
	PN 10	132	158	22	100	145	0,650
	PN 16	132	158	22	100	145	0,830
140	PN 20	132	158	22	100	145	0,900
	PN 25	132	160	22	100	145	1,050
	PN 10	155	188	27	95	150	0,880
	PN 16	155	188	27	95	150	1,018
160	PN 20	155	188	27	95	150	1,250
	PN 25	155	188	27	95	150	1,400
	PN 32	155	188	27	95	150	1,550
	PN 10	175	212	25	110	165	1,180
180	PN 16	175	212	25	110	165	1,440
	PN 20	175	212	25	110	165	1,900
	PN 25	175	218	30	105	160	2,000
	PN 32	175	218	30	105	160	2,150
180	PN 10	185	212	30	110	170	1,480
	PN 16	185	212	30	110	170	1,742
	PN 20	185	212	30	110	170	1,940
	PN 25	185	218	30	115	165	2,240
	PN 32	185	218	30	115	165	2,700





**PE 100 SDR 11(PN16) & SDR 17(PN10)**  
Flange Adapter - Long Type (Injection)

Standard: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

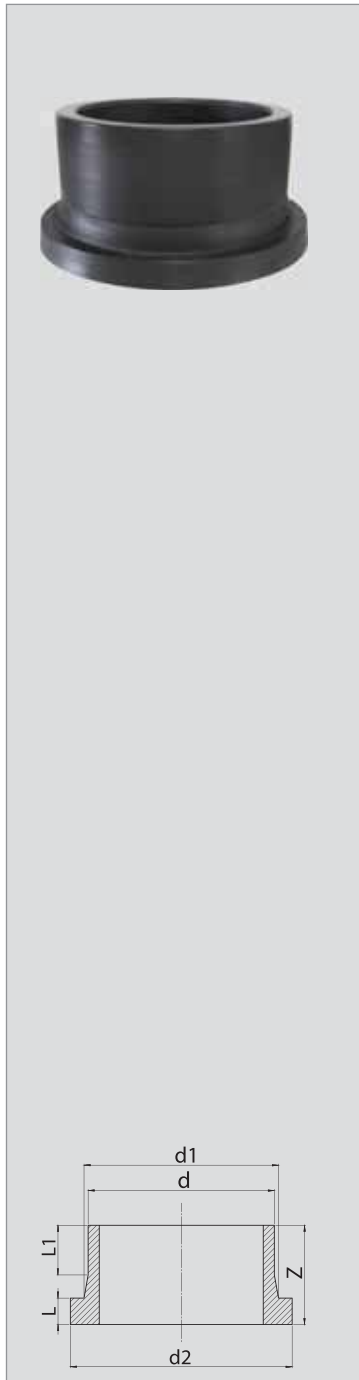

Size(mm)	Pressure(Bar)	d1 (mm)	d2 (mm)	L (mm)	L1 (mm)	Z (mm)	Weight (kg)
<b>d</b>							
200	PN 10	232	268	30	125	185	2,347
	PN 16	232	268	30	125	185	2,705
	PN 20	232	268	30	125	185	3,150
	PN 25	232	272	35	125	185	3,600
225	PN 10	235	268	30	110	170	2,342
	PN 16	235	268	30	110	170	2,960
	PN 20	235	268	30	110	170	3,100
	PN 25	235	272	30	115	170	3,600
	PN 32	235	272	30	115	170	4,390
250	PN 10	285	320	30	135	200	3,482
	PN 16	285	320	30	135	200	4,460
	PN 20	285	320	30	135	200	5,230
	PN 25	285	330	30	140	200	5,850
280	PN 10	291	320	35	140	220	4,030
	PN 16	291	320	35	140	220	4,765
	PN 20	291	320	35	140	220	5,850
	PN 25	291	330	40	140	215	6,950
315	PN 10	335	370	35	155	215	5,145
	PN 16	335	370	35	155	215	6,372
	PN 20	335	370	35	155	215	7,440
	PN 25	335	385	35	160	245	11,350
355	PN 10	373	430	35	137	210	6,745
	PN 16	373	430	35	137	210	8,247
	PN 20	373	430	35	137	210	9,540
400	PN 10	427	482	45	140	221	8,747
	PN 16	427	482	45	140	221	11,277
450	PN 10	460	535	45	175	276	12,465
	PN 16	460	535	45	175	276	17,235
500	PN 10	530	585	48	175	279	16,520
	PN 16	530	585	48	175	279	21,370
560	PN 10	615	685	50	205	305	25,350
	PN 16	615	685	50	205	305	30,450
630	PN 10	640	685	55	255	330	29,100
	PN 16	640	685	55	255	330	39,150