




**PE 100 SDR 11(PN16) & SDR 17(PN10)  
EF Coupler**

Standard: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

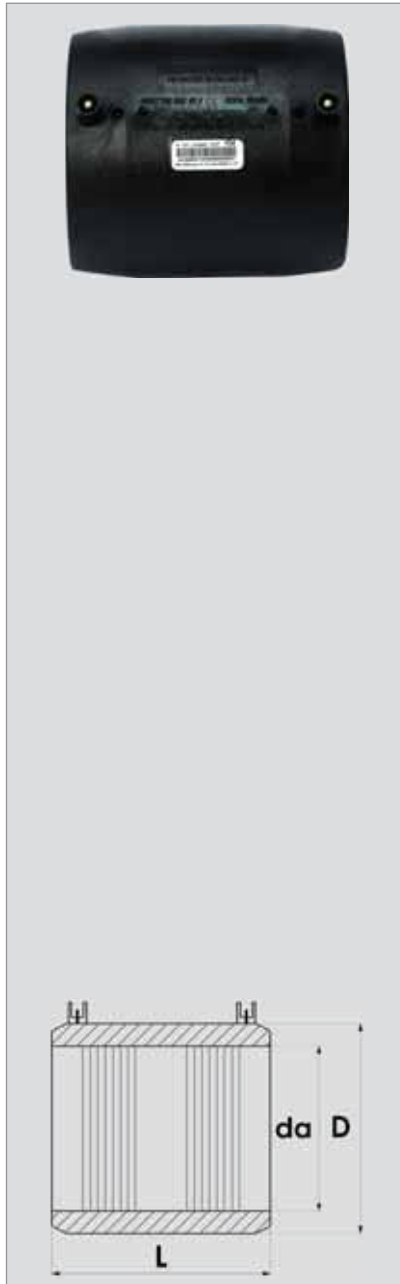

Size (mm)	Pressure(Bar)	D L		Weight (kg)
		(mm)	(mm)	
d				
20	PN 10-PN 16	31	68	0,031
25	PN 10-PN 16	36	71	0,039
32	PN 10-PN 16 PN 20	43	72	0,052
40	PN 10-PN 16 PN 20	53	80	0,075
50	PN 10-PN 16 PN 20	65	87	0,114
63	PN 10-PN 16 PN 20	80	95	0,170
75	PN 10-PN 16 PN 20	95	110	0,280
90	PN 10-PN 16	110	122	0,385
	PN 20-PN 25	110	125	0,542
110	PN 10-PN 16	133	143	0,555
	PN 20-PN 25	135	145	0,842
125	PN 10-PN 16	152	157	0,790
	PN 20-PN 25	145	155	1,054
140	PN 10-PN 16	163	165	0,890
	PN 20-PN 25	165	160	1,394
160	PN 10-PN 16	195	175	1,360
	PN 20-PN 25	190	185	1,944
180	PN 10-PN 16	218	192	1,850
	PN 20-PN 25	235	200	3,808
200	PN 10-PN 16	245	206	2,900
	PN 20-PN 25	270	220	5,750
225	PN 10-PN 16	273	222	3,700
	PN 20-PN 25	302	244	6,900
250	PN 10-PN 16	302	244	4,400
	PN 20-PN 25	350	250	10,075
280	PN 10-PN 16	350	250	6,450
	PN 20-PN 25	380	258	12,050
315	PN 10-PN 16	380	265	8,000
	PN 20-PN 25	425	250	14,650

The dimeters of 450-500-560-630-710-800 PN 20 - PN 25 can be produced according to your order.


Products with diameters ranging between 180 and 500 are produced specially for PN 32.



**PE 100 SDR 11(PN16) & SDR 17(PN10)  
EF Coupler**

Standard: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

Size (mm)	Pressure(Bar)	Code No	D L		Weight (kg)
			(mm)	(mm)	
d					
355	PN 10	410	258	8,000	
	PN 16	428	258	10,333	
	PN 20-PN 25	489	261	21,150	
400	PN 10	460	261	10,000	
	PN 16	490	261	13,715	
	PN 20-PN 25	557	323	32,900	
450	PN 10	510	323	16,000	
	PN 16	557	323	22,941	
500	PN 10	570	350	21,000	
	PN 16	615	350	29,258	
560	PN 10	640	350	24,600	
	PN 16	685	350	38,360	
630	PN 10	720	360	29,500	
	PN 16	780	360	54,300	
710	PN 10	810	380	38,500	
	PN 16	880	380	68,500	
800	PN 10	910	400	60,000	
	PN 16	980	400	89,000	
900	PN 10	1025	450	80,000	
	PN 16	1105	450	130,000	
1000	PN 10	1140	500	111,500	
	PN 16	1225	500	165,000	
1200	PN 10	1370	500	161,000	
	PN 16	1450	500	245,000	
1400	PN 10	1600	550	243,000	
	PN 16	1700	550	380,000	
1600	PN 10	1830	575	336,000	
	PN 16	1900	575	448,000	



The dimeters of 450-500-560-630-710-800 PN 20 - PN 25 can be produced according to your order.  
Products with diameters ranging between 180 and 500 are produced specially for PN 32.