



**PE 100 SDR 11(PN16) & SDR 17(PN10)
EF Elbow 90°**

Standard: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

Size(mm)	Pressure(Bar)	d1 (mm)	L (mm)	L1 (mm)	Z (mm)	Weight (kg)
d						
20	PN 10-PN 16	31	44	34	10	0,042
25	PN 10-PN 16	36	48	34	14	0,054
32	PN 10-PN 16	45	53	35	18	0,070
40	PN 10-PN 16	55	61	39	22	0,118
50	PN 10-PN 16	67	70	42	28	0,172
63	PN 10-PN 16	81	80	46	34	0,276
75	PN 10-PN 16	95	100	61	39	0,475
90	PN 10-PN 16	113	120	63	57	0,800
110	PN 10-PN 16	137	143	80	63	1,345
125	PN 10-PN 16	152	140	77	63	1,520
*140	PN 10	163	278	83	195	3,240
	PN 16	163	278	83	195	3,778
160	PN 10-PN 16	195	171	93	78	2,920
*180	PN 10-PN 16	222	152	105	47	5,620
*200	PN 10-PN 16	246	215	104	110	5,500
*225	PN 10-PN 16	276	245	120	135	9,750
*250	PN 10	302	412	122	290	15,570
	PN 16	302	412	122	290	17,960
*280	PN 10	350	425	125	300	21,720
	PN 16	350	425	125	300	25,218
*315	PN 10	380	468	133	335	29,415
	PN 16	380	468	133	335	34,256
*355	PN 10	410	474	129	345	31,880
	PN 16	425	474	129	345	42,377
*400	PN 10	460	501	131	370	41,005
	PN 16	490	501	131	370	57,605
*450	PN 10	510	607	162	445	62,960
	PN 16	555	607	162	445	89,762
*500	PN 10	570	660	175	485	84,180
	PN 16	615	660	175	485	117,516
*560	PN 10	640	968	175	793	126,468
	PN 16	685	968	175	793	190,648
*630	PN 10	720	1008	180	828	160,810
	PN 16	780	1008	180	828	258,234




ORJ.



KIT



Ø180 Ø200 Ø225

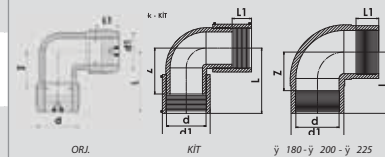

*Products which marked are specially produced.